


EXTERIOR WALL S4.3

M1:10

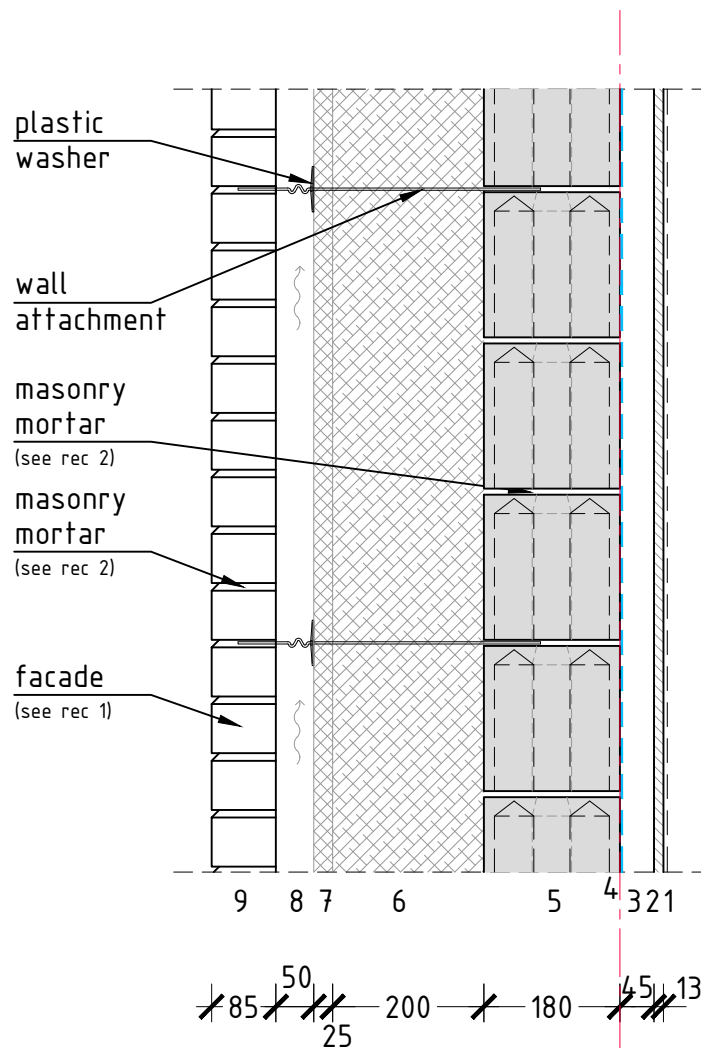

CONSTRUCTION

Exterior wall

1. Interior finish
2. Wall plate 13mm
3. Wood frame
4. Steam barrier
5. Silicate block 300x180x192mm
6. Insulation $\lambda=0.035\text{W/mK}$
7. Wind barrier plate $\lambda=0.035\text{W/mK}$
8. A breathing air gap
9. Facade brick 250x85x65mm

NOTE:

The drawing is of informative nature and not suitable for design work

STRUCTURE	NET WEIGHT [kN/m ²]	THERMAL CONDUCTIVITY [W/m ² K]	RECOMMENDATIONS
EXTERIOR WALL	4,7	0,15	1. For more information on facade bricks, see www.silikaat.ee/tooted/silikaatto/silikaattellised/
			2. For more information on masonry mortar, see www.silikaat.ee/tooted/kuivsegud/